

AMTEC SOLAR


PROMINENCE 36

- Listed to UL1741, CAN/CSA C22.2, CE Marked
- NEMA 4X Fiberglass enclosure
- Rated for up to 540A at 1000VDC
- 25.5" (H) x 21.5" (W) x 10" (D), 43 lbs. overall weight
- Back pan with integrated wire management and silk-screening
- Positive busbar eliminates messy wiring to fuse blocks
- Positive and Negative outputs: 2X 350MCM-6AWG
- Finger safe fuse holders
- Clear safety covers
- Bridge punches for clean wire management



**Reinforced Busbars
Finger Safe Fuse Holders**

Clear Safety Covers

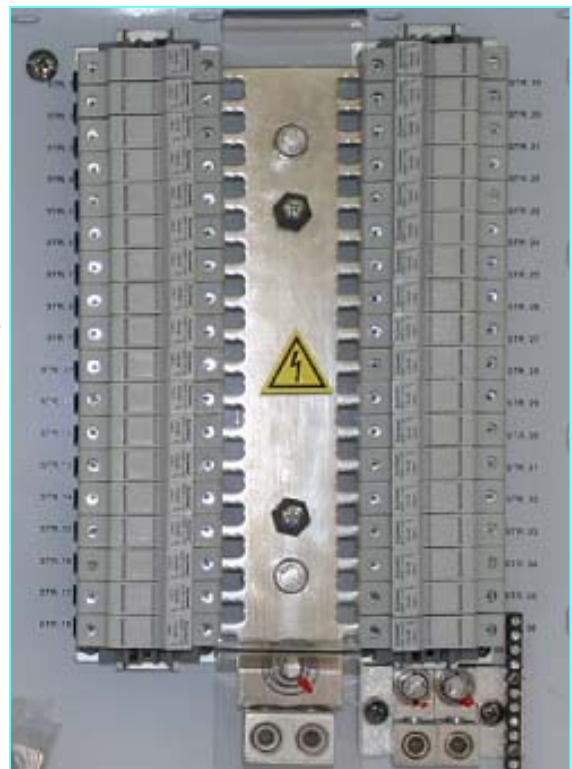

AMtecSolar.com

AMtec Solar, A Division of AMtec Industries
2501 Industrial Parkway West
Hayward, CA 94545
510.887.2289