


AMTEC SOLAR

PROMINENCE SERIES COMBINER BOXES WITH INTEGRATED DISCONNECT SWITCH

- Listed to UL1741, CAN/CSA C22.2 Listed @ **600 Volts**, CE Listed @ **1000 Volts**.
- NEMA 4X Fiberglass Enclosure for, optional NEMA 4 and NEMA 4X SS.
- Load Break 200Amp Disconnect at 600VDC maximum output rated for continuous duty class DC-21.
- Internal or External rotary handle.
- Standard string count 8, 12, 16 and 24 strings. Custom sizes available.
- Backpan powder coated white with integrated wire management and silk screened labels.
- Custom bus bar supported with 1000VDC rated insulators for added rigidity.
- Lexan shields over all live parts for completely deadfront unit.
- Finger safe fuse holders.
- Stainless steel hardware inside and out.
- Optional Surge Protection.

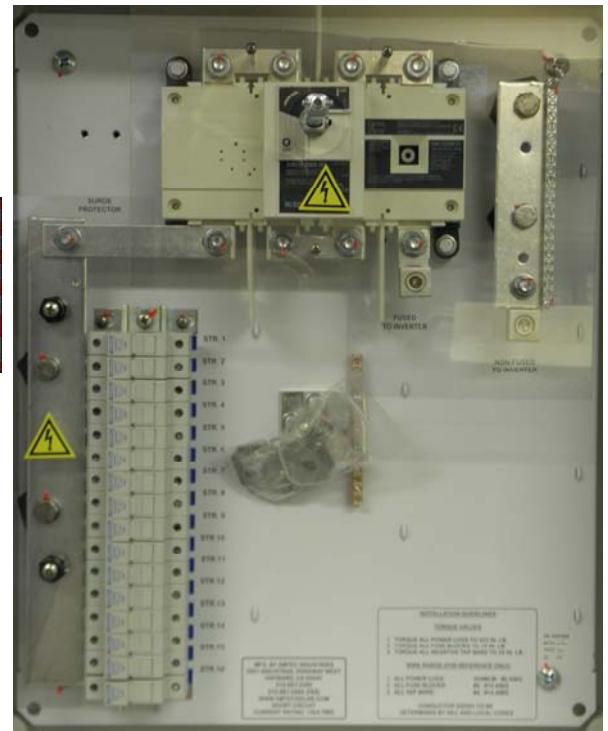

www.AMtecSolar.com

<http://amtecsolar.com/documents/promdisconnect.html>

Sales: Info@AMtecSolar.com

Phone: (510) 887-2289

Mail: 2501 Industrial Parkway West, Hayward, CA 94545

